


Film Tech Japan 2013 Exhibition product list



	Product	Tape No.	Features
Thermal conductive	Flame retardant double-coated thermal conductive adhesive tape	Trial product No.7093	Thick thickness (0.25mm) . Baseless. Halogen free flame retardant. UL94 VTM-0 Flame retardant regulation by our internal test
		No.7092	Overall thickness 0.125mm. Base: PET film (0.004mm) Halogen free flame retardant. UL94 VTM-0 Flame retardant regulation by our internal test
	Double-coated thermal conductive Kapton® adhesive tape	No.7090	Base:Thermal conductive Kapton® film
	Double-coated thermal conductive adhesive film tape	No.7091	Base :PEEK film
Electrical conductive	Copper foil conductive adhesive tape Thin type	No.8313 (0.03mm) No.8315 (0.05mm)	The tape thickness is thinnest among our standard type, and the weight is lightest. High conductivity only apply.
	Double-coated conductive adhesive tape Thin type	No.796 (0.05mm)	
	Double-coated conductive non- woven fabric adhesive tape	Trial product No.7742 (0.03mm) No.7741 (0.05mm)	Flexible conductive non- woven fabric backing for using in sharp bending part. High conductivity only apply.
Kapton®	Kapton® adhesive tape	No.6505 No.7602 etc.	We have a wide assortment of Kapton tapes. Good for machine using and dimensional stability. Silicone based adhesive have stable adhesion for several materials. And it can be used in high temperature and long time using without adhesive residue and stains.
Around LCD of smart phone	For optics Non-backing transfer adhesive tape	No.7029	Extra transparent It is possible laminate on ITO surface, due to use adhesive, which low influence to ITO. Thickness:0.015mm, 0.025mm, 0.05mm, 0.075mm
	Double-coated adhesive film tape	No.7072 (0.005mm) No.7647 etc.	Rich variation about thickness, adhesion and color. Another color also available such as black, white or black/white.
	Waterproof and shock resistance double-coated adhesive tape	No.7813	Excellent for waterproof and shock resistance. Overall thickness: 0.15mm, 0.2mm, 0.25mm, 0.3mm, 0.4mm, 1.1mm
	Polyester film adhesive tape Thin type	Trial product No.633N No.633M etc.	arious type: matt surface, high concealment, for electrical insulation, etc. Overall thickness : 5 μ m ~
Construction	Splash prevention heat shield film	No.6240 #50	The heat of summer is reduced and keeping indoor light. Ultraviolet rays are omitted 99%. Excellent for energy-saving measures. This tape uses ASAHI GLASS film "HX-3".
	P - Cut tape	No.4100 No.4140 etc.	P-Cut tape is a masking tape made from a polyethylene cloth backing that allows for easy cutting by hand.
Environment	Environmental protection product		Toluene free, Non Halogen Flame retardant, removable etc.

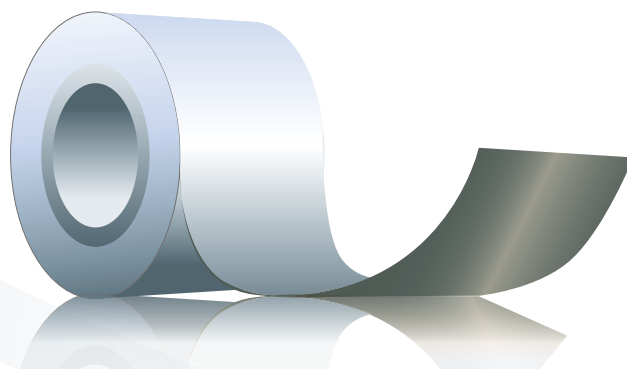

TERAOKA SEISAKUSHO CO., LTD.

<http://www.teraokatape.co.jp>

Foreign Business Dept.

1-4-22, Hiromachi, Shinagawa-ward, Tokyo, 140-8711 TEL 81-3-3491-1393

Office(overseas)

Seoul, Taipei

Group companies (overseas)

HONG KONG, SHANGHAI, SHENZHEN, Indonesia