

Rats learn by biting!

Rat-proof

vinyl adhesive tape



This product contains a spicy ingredient that rats don't like (capsaicin).

When rats gnaw on it, they learn to avoid it, helping prevent damage to wiring.

Easy installation by just wrapping the tape

Containing chili pepper extract

* Chili pepper extract is a food additive (FDA approved product)

Protecting electric wires and cables

Rat-proof vinyl adhesive tape No.347G

Features

This product contains capsules containing "chili pepper extract" that rats don't like and has repellent effect.
* Chili pepper extract is a food additive (FDA approved product).

Use application


Protecting electric wires, pipes, cables, etc. from rats

Rat repellent effect

The effect is expected to last for approximately 30 years (indoor 23°C), however, duration may be shortened by high temperatures, sunlight outdoors, or weather conditions.
It is recommended to apply double layers of tape.

<Comparison between regular vinyl tape and rat-proof vinyl tape No.347G>

Test conditions: The cable was wrapped in tape and placed in a cage with a rat for six days

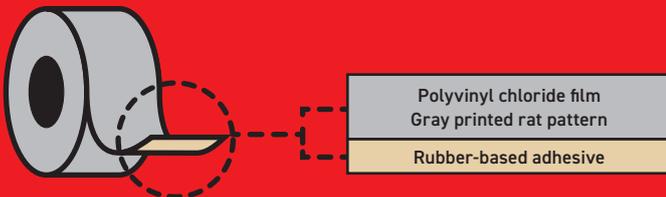

Easy to sell separately



Size: 19mmx20m
Quantity: 1 case (60 rolls included)

Item	No.347G
Total thickness (mm)	0.2
Standard color	Gray with mouse pattern
Standard width (mm)	19
Standard length (m)	20
Peel adhesion (N/25mm)	4.28
Tensile strength (N/25mm)	95.4
Elongation (%)	258

Precautions for use

- The product is irritating to eyes and mucous membranes. Always wash your hands after handling the product.
- When using the product, people with sensitive skin shall wear gloves or wash hands frequently.
- Please be careful not to put the product in your mouth or lick it.
- Keep the product out of reach of children.
- Do not attach the product to the human body.
- Wipe off dust, oil, and moisture from the surface to be applied, and press firmly to apply.
- When storing the product, avoid direct sunlight, high temperatures and humidity.
- The described values are an example of measurement using JIS or our own test method and not the guaranteed values.
- Before using the product, please conduct tests in advance to ensure that the it is suitable for your intended use.
- Products and product specifications are subject to discontinuation or change without notice .



Teraoka Seisakusho Co., Ltd.

- Overseas Sales Department
1-4-22, Hiromachi, Shinagawa-ku, Tokyo 140-8711, Japan
TEL: +81-3-3491-1393
- Head Office
1-4-22, Hiromachi, Shinagawa-ku, Tokyo 140-8711, Japan
- Plants
Kannami, Sano, Ibaraki, and Indonesia

- Seoul Branch Office
Rm. 806, 34 Hwangsae wool-ro 200, Bundang-gu, Sungnam-si, Gyeonggi-do, Republic of Korea
TEL: +82-31-711-8315
- Taipei Representative Office
8F, No.101, Section.2, Nanjing East Road, Zhongshan District, Taipei City, 104089, Taiwan, R.O.C.
TEL: +886-2-2503-1910
- TERAOKA SEISAKUSHO (HONG KONG) CO.,LTD.
Room 1708, Ever Gain Plaza Tower 2, No.88, Container Port Road, Kwai Chung, N.T., Hong Kong
TEL: +852-2369-9313
- TERAOKA SEISAKUSHO (SHANGHAI) CO.,LTD.
Site G 2nd Floor, No.185, Taigu Road, Waigaoqiao Free Trade Zone, Shanghai, China
TEL: +86-21-5868-2951
- TERAOKA SEISAKUSHO (SHENZHEN) CO.,LTD.
Factory C, First Floor, Fenda Industrial Park, Baoyuan Community, Shiyuan Street, Baoan District, Shenzhen City, China TEL: +86-755-2970-6500